


## A . Features

- 18 digits display with smart function
- Bluetooth 4.0 BLE compliance, APP support Samsung Andriod system
- Watch time synchronize with phone time automatically
- Phone call ,instant messaging,Phone SMS,email ,Phone memo alert
- Reject call answer
- Anti-lost alert
- Emergency call for help
- Remote phone camera
- 12 digits time display hour, minute, second, date, week;
- 12/24 Hour format selectable;
- Worldtime
- Stopwatch
- Alarm
- EL backlight

## B . Product Function Modes

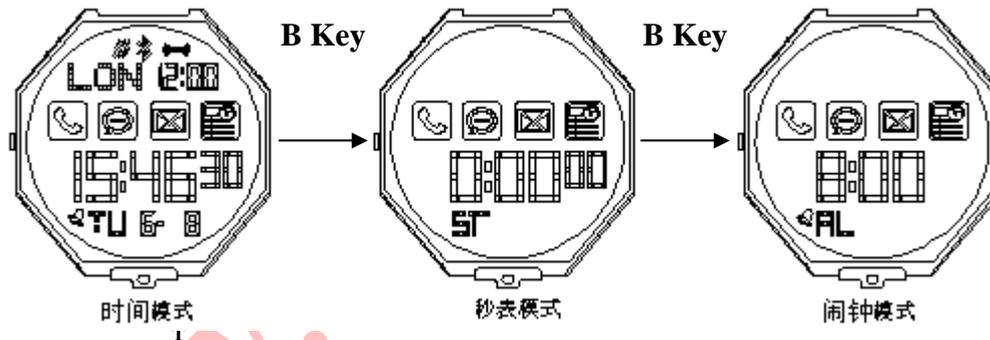

- In any Mode, press A key to illuminate EL for 3 seconds,
- Press B key shortly to select operational Mode( Alarm Mode will return to Time Mode automatically if no any key active within 1 minute)
- In Time Mode, press B key for longer than 2 seconds to turn on/ off Bluetooth , when start up ,bluetooth icon will flash ,it will display on the screen when bluetooth connecting successfully ,it will flashing all the time when Bluetooth connecting failed .
- In Time Mode,press B key for longer than 2 seconds to select phone reminder sound in sequence( single vibration ON) (single tone ON)(tone and vibration ON)(tone and vibration OFF)
- When bluetooth connecting success, press B and D key together to active searching function , when phone is searched , it will alarm for 10 seconds.
- **Emergency call fuction:** In any Mode, press A and C key together to active Emergency call function, your phone will dial the number which has been set automatically

- **Anti-lost alert:** when your phone is far away from you in a distance, the watch will alarming by BB BB, or vibration for 5 seconds.
- **Remote Phone Camera:** when your camera open, press B and D key together to capture photo automatically
- **Reject Call Answer :** When your phone is ringing, press any key to reject answering, the phone stop ringing .

## ➤ 1. Phone Call ,Instant Messaging,Phone SMS,Email and Phone Memo Alert Mode

- When watch connect phone successfully , the watch ring by B-B tone or virbration sound if your phone have phone call, instant messaging, SMS,email and memo alert .



Phone Call Reminder



Instant Message



Email Reminder




User-defined Memo Reminder

- When there is a phone call , the phone symbol will blink fast . it will blink slow when phone call missed, when you viewed missed call from phone, icon on watch will stop blinking .
- Icons will not stop blinking when user do not view phone or only view watch icon unless you press any key of the watch to stop .
- The blinking symbol including (Instant message, Wei chat, QQ, Sina Wei blog, Tencent Wei blog, facebook, Twiffer, Whatsapp) To realize reminder functions, the user need to turn ON relative items in the settings of phone

**Remark:** The email reminder function of current APP version can only comply with the system of Gmail

## 2. World Time Mode

- When watch received world city time zone name, it will update the time zone code and relative world time automatically
- Press D or C key to check world city time zone
- Press and hold C key for 3 seconds to turn ON/OFF DST time ,the icon “DST” will display on the up right screen as below :

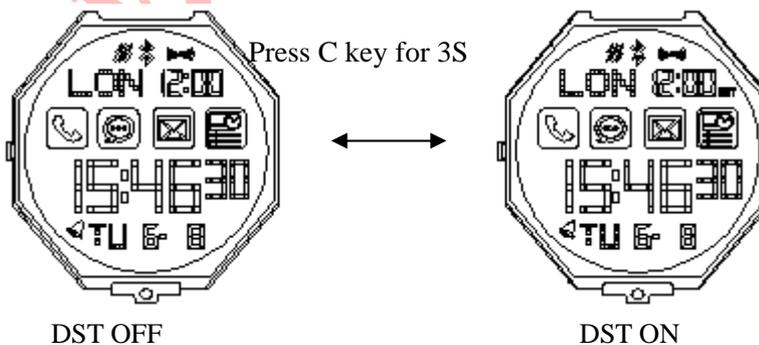

- (DST). Under local time time zone , when turn ON/OFF DST time , the normal time will synchronously turn ON/OFF DST time automatically.


**Remark:** the DST time of each time zone can turn ON/OFF independently.

## World Time City Code reference table:

City code	City Name	GMT Differential	Other major cities in same time zone
GMT	GMT	0	
WLON	London	0	Dublin, Lisbon Casablanca, Dakar, Abidjan
PAR	Paris	+1	Milan Rome, Madrid, Amsterdam, Algiers, Hamburg, Frankfurt, Vienna, Stockholm, Berlin.
CAI	Cairo	+2	Athens Helsinki, Istanbul, Beirut Damascus Cape town
JED	Jeddah	+3	Kuwait Riyadh, Aden Addis Ababa Nairobi Moscow
THR	Tehran	+3.5	Shiraz
DXB	Dubai	+4	Abu Dhabi Muscat
KBL	Kabul	+4.5	
KHI	Karachi	+5	Male
DEL	Delhi	+5.5	Mumbai Kolkata
DAC	Dhaka	+6	Colombo
RGN	Yangon	+6.5	
BKK	Bangkok	+7	Jakarta, Phnom Penh, Hanoi Vientiane
HKG	Hongkong	+8	Singapore Kuala Lumpur Beijing Taipei Manila Perth Ulaanbaata
SEL	Seoul	+9	Seoul Pyongyang
TYO	Tokyo	+9	Tokyo
ADL	Adelaide	+9.5	
SYD	Sydney	+10	Melbourne Guam Rabaul,
NOU	Noumea	+11	Pt Vila
WLG	Wellington	+12	
PPG	Pago	-11	
HNL	Honolulu	-10	Papeete
ANC	Anchorage	-9	Nome
LAX	Los Angeles	-8	San Francisco, Las Vegas, Vancouver, Seattle/Tacoma, Dawson City
DEN	Denver	-7	Paso, Edmonton
CHI	Chicago	-6	Houston, Dallas/Ft. Worth, New Orleans, Mexico City, Winnipeg
NYC	New York	-5	Montreal, Detroit, Miami, Boston, Panama Havana, Lima, Bogota
CCS	Caracas	-4	La Paz, Santiago, Pt Of Spain
RIO	Rio De Janeiro	-3	Sao Paulo, Buenos Aires, Brasilia, Montevideo
REC	Recife	-2	
AZO	Acores Island	-1	

### 3. Time and Date Setting

- In the normal Time Mode, Press A key for longer than 3 seconds to access Time and Date Setting along with “Time Zone” flashing , Press B key to change mode in sequence as following

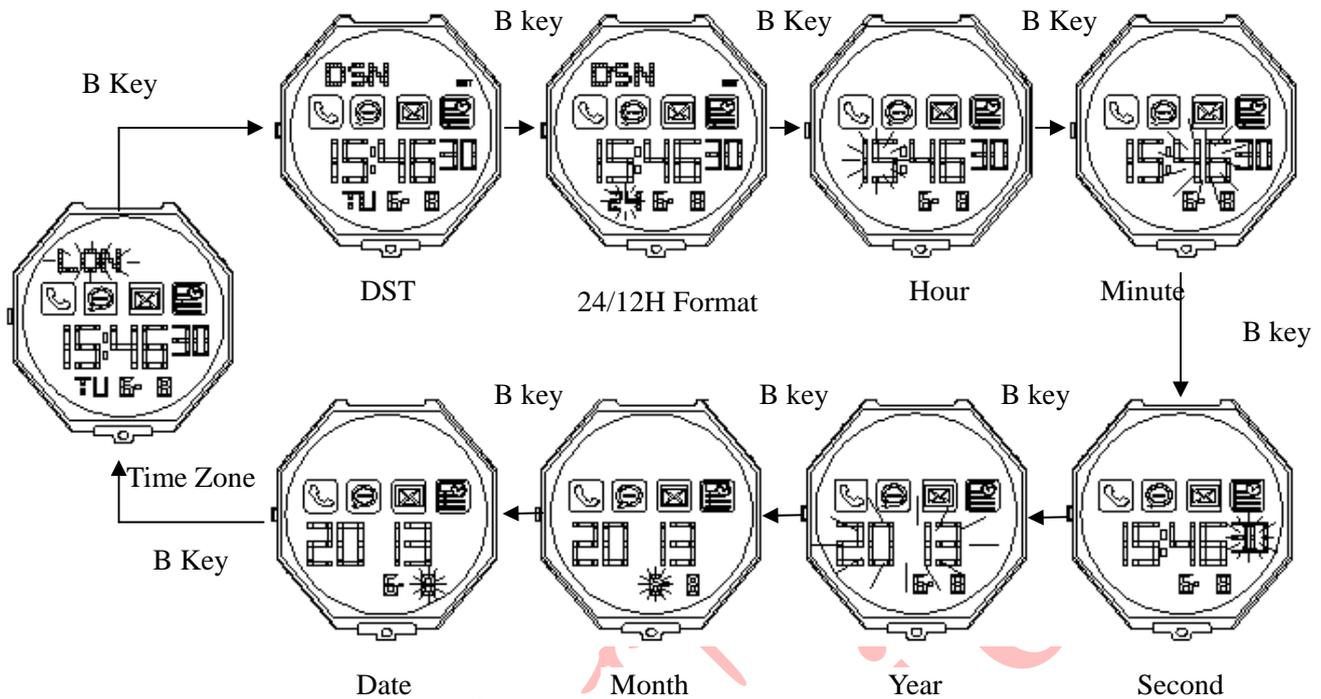


- Press D key shortly to adjust “plus” time zone, Press D key longer to adjust quickly
- Press C key shortly to adjust “minus” time zone, Press C key longer to adjust quickly
- Press D or C key to turn ON/OFF DST time, the icon “DST” will display on the screen
- Press D or C key to select 12/24H format
- Press D key shortly to increase adjusting digit, Press D key longer to increase adjusting digit quickly
- Press C key shortly to decrease adjusting digit , Press C key longer to decrease adjusting digit quickly
- Press D or C key to reset second, second digits will run to 00
- Press A key to confirm and exit setting , then switch back to normal Time Mode
- During Time or Date setting , if no any key active in 1 minute, it will switch back to Time Mode automatically
- When Normal time selected 12 or 24H format , the world time will synchronously adjust to 12 or 24H format

### 4. Stopwatch Mode

- Max Stopwatch counting range: 23H 59M 59.99S, it will stop and re-counting from “0” when counting to the max value 23:59:59.99


#### Stopwatch Setting

- Stopwatch Mode, Press D key to start/Stop running , When it stop running, press C key to reset to 00, please refer below :

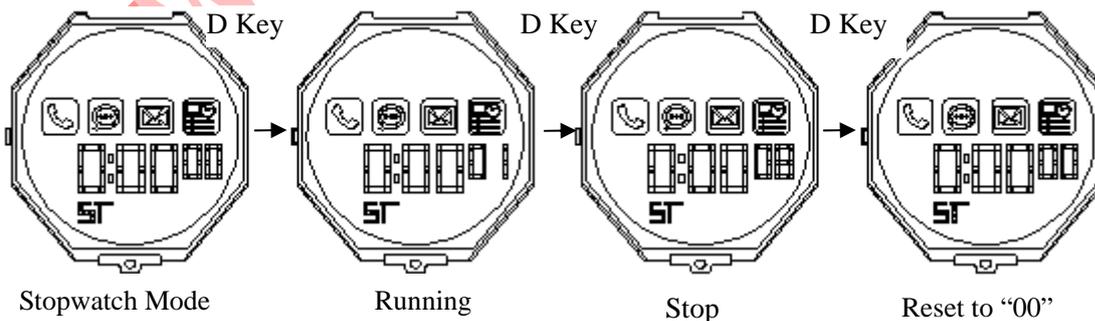


#### Stopwatch for LAP counting

- When stopwatch running ,press C key to enter into LAP counting, Press D key to stop, Press C key to check total value, press C key again to reset stopwatch value to “0”, refer as below:

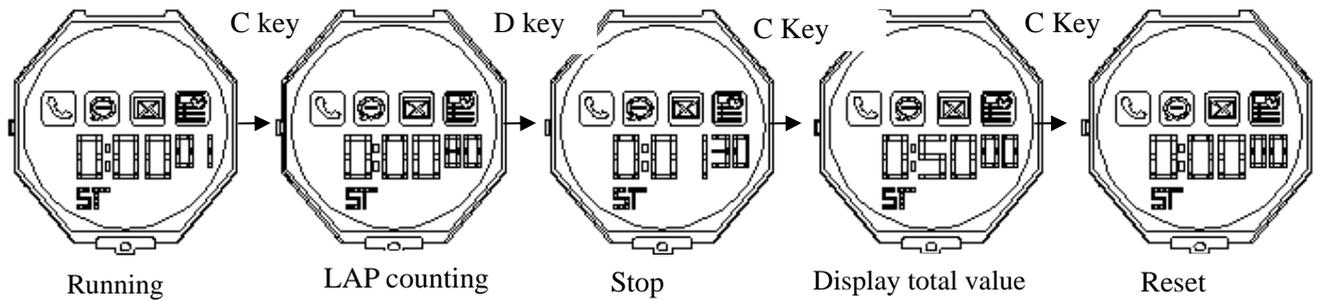


- In LAP mode , Press C key to exit, press D key to stop running, Press C key again to reset to “0”,refer as below::

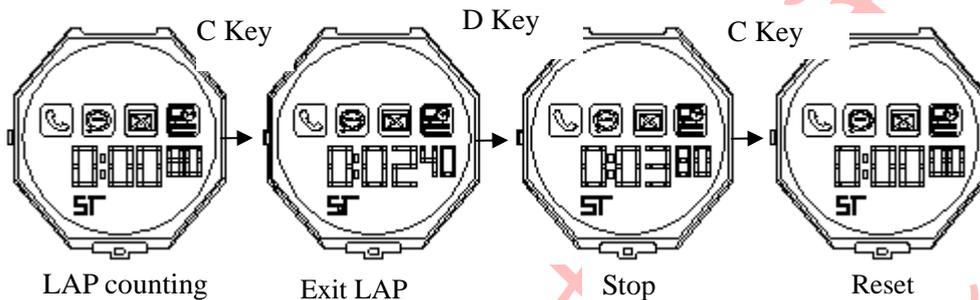

- When stopwatch running, press B key to switch back to other Mode , it will run in the background
- When stopwatch is running or running in the background, the icon “ST” will flash when switch to any other mode


## 5. Alarm Mode

- In Alarm Mode, press C key to turn ON/OFF alarm
- 

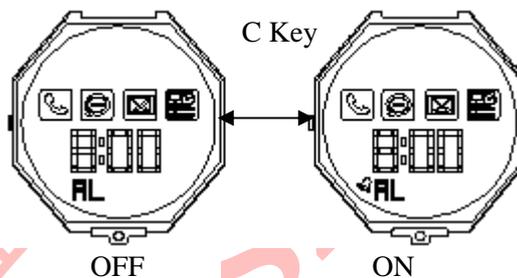

### Alarm Setting :

- In Alarm Mode, press A key longer than 3 seconds along with“ Hour “ flash to access Alarm Setting ,Press B key to select items in sequence as below :

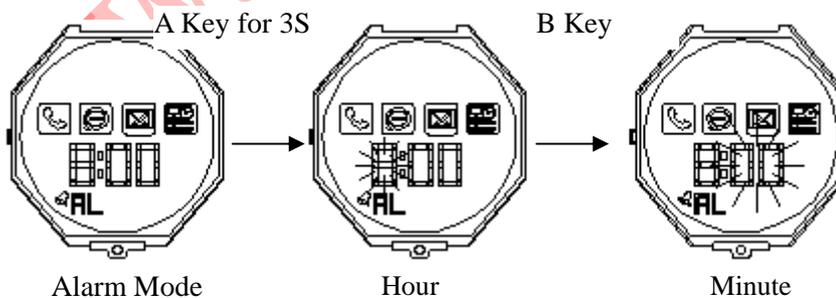

- Press D key shortly to increase adjusting digit, Press D key longer to increase adjusting digit quickly
- Press C key shortly to decrease adjusting digit , Press C key longer to decrease adjusting digit quickly
- Press A key to confirm and exit setting , then switch back to Alarm Mode
- During setting , if no any key active in 1 minute, it will switch back to Time Mode automatically
- When time is up to set alarm time , it will ring for 30 seconds with BB-BB, press any key to stop alarming

**Notes:** When enter into APP interface, you can also set watch alarm time , you can select Saturday and Sunday to No Alarming,or turn ON/OFF alarming, No matter you set watch alarm manually or use phone APP setting watch alarm ,your watch will choice the last setting time for alarming

## 6. Phone APP Setup

Means1) Use your Phone to log in <https://play.google.com/store/search?q=BJ>( Find “BJwatch” from Google play to install to your mobile phone ( Google play account need to be setup for first time user, 如果遇到某些原因网站有限制而无法安装 APP 程序,请按下面方法 2) 或方法 3)进行安装)

Means 2) 用手机扫描二维码直接进入客户网站下载 “BJwatch.apk”, 下载完成后点击安装。(二维码如下图)




(如果遇到某些原因二维码仍然无法安装 APP 程序,请按下面方法 3)进行安装)

Means 3) Use your Phone to user can log in <http://en.szbaojie.com/productxx/&productId=64e28701-db50-4ca9-8960-d32f46c3eaba.html> to download file “BJwatch.apk”, then find the “ Bluetooth Watch .apk” in your mobile phone to install . Take I9500 of Samsuny phone for example , open “BJwatch.apk”, you can find below interface, click on the RED circle object to finish install ( If your mobile phone already installed “91 assistant”,click “BJwatch.apk” directly can find the install information and finish install automatically )

Notes: All below illustrations are for reference only, interface will has difference for different mobile phone or if your phone system upgraded




After finished installment, the user have to go back to application interface “Settings- My Device – Secondary Function” to turn on “BJ watch” as below :

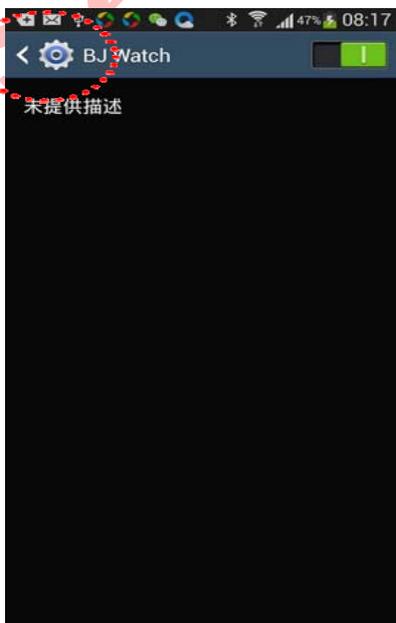

Click “ My Device--Secondary Function” to turn On “ Interactive control” as below (1) :

➢ Slide your phone from top of the interface to pop up picture (2) as below , turn on “synchronization”

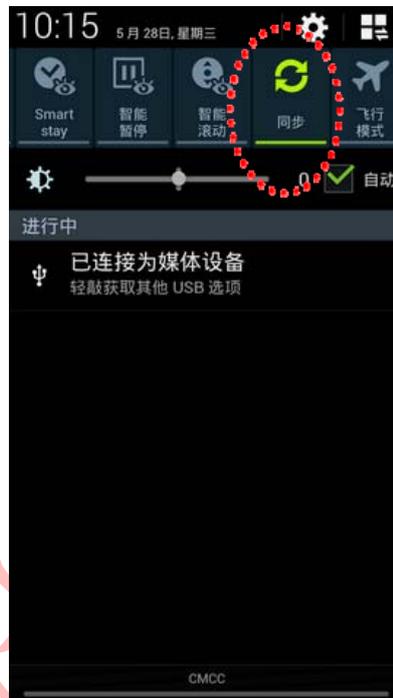

## ● Phone Data Connecting

➢ Turn on the bluetooth of your smart watch , then click up “ BJ watch “ in application page of your phone ,then access “ BJ watch” page as below :



Click “BJ watch”



Click BJ



Find BJ watch

➤ Click “BJ” to search the device , when the smart watch found in your phone , click Baojie to access settings as below :



All the symbols in this interface can turn on/off,dark when turn off

When all symbols turn on,click setting

Access setting interface

## Notices:

- 1) Bluetooth compliance fuction of this production is one to one, when your watch is connecting with your phone , please don't use any more mobile phones or more watches for Bluetooth connection in the distance of 15M .
- 2) If your watch connected with a wrong mobile, or your phone connected with a wrong watch, please access “ Setting-Remove All Current Connection” as below, then stay away from the current location and re-search again .



Re-search

## ● APP Home Page Operation

- The “BJ Watch “ APP interface have phone call , message email,alarm , camera, time synchronize with phone, click “  ” to access search , when it connect successful with your smart watch , the watch will ringing or vibration one time .
- Click the symbol “  ” to turn on or off phone call reminder function
- Click the symbol”  ” to turn on or off mail reminder function
- Click the symbol “  ” to turn on or off message reminder function
- Click the symbol “  ” to turn on or off user-defined notes reminder function
- Click the symbol “  ” to access synchronous time setting function (this fuction can’t use if device did not connect)
- Click the symbol “  ” to active remote phone camera function
- Click “ Settings ” to access setting items

## ● Phone Call Reminder Filter Settings

- All Call in phone numbers including : All Numbers in contacts or parts of Numbers of your contacts which selected by user



Phone Call Filter Selection



Select all Phone Numbers




Select Set Phone Numbers

## ● Mail Reminder Filter Setting

➢ You can select Email or Gmail or two of them for reminder function ( this version only support Gmail system)



Mail Filter Selection

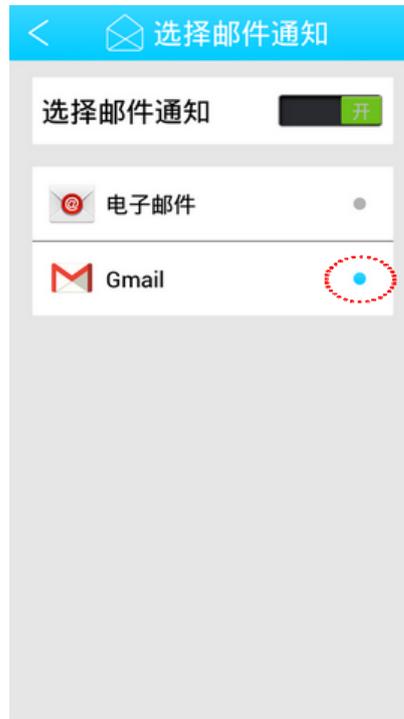


Select Gmail

## ● Instant Message Reminder Filter Settings


➢ All instant messages can turn on /off at the same time, or select parts of them or one of them to turn on/off ,including: phone message, QQ message, Wei chat ,Skype, Sina wei blog, tencent wei blog, Facebook、Twitter、WhatsApp。



Message Filter Selection

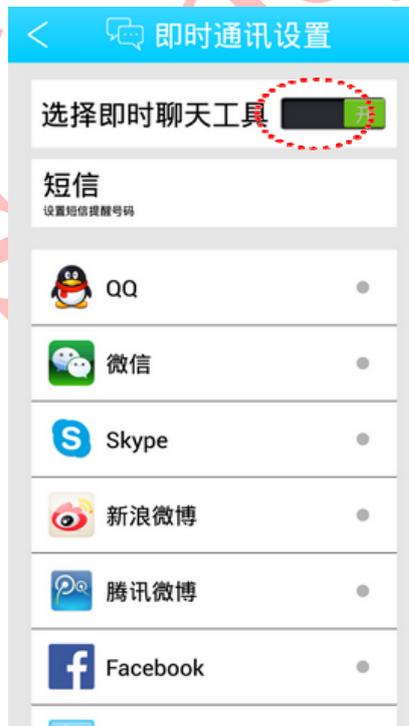


Turn on/off instant chat tool

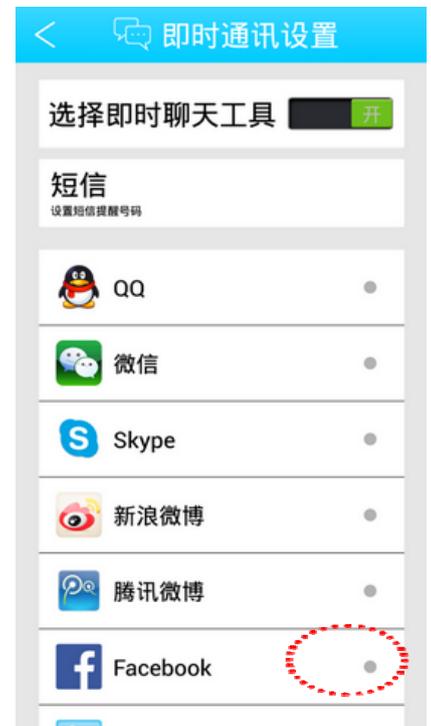

Select reminder catalogue


➤ Select message filter: all messages or parts of messages of the contacts which selected by user

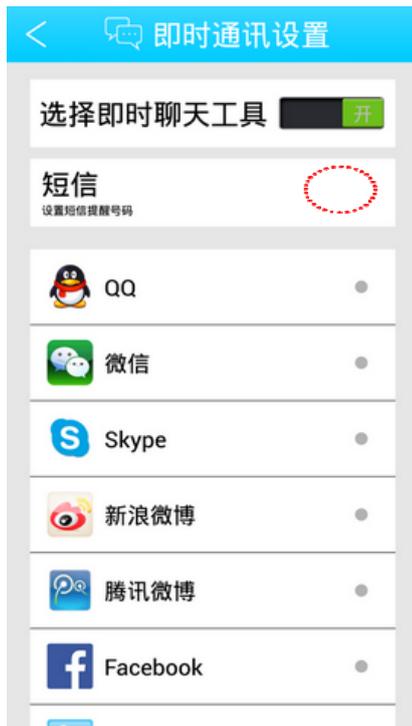

Message Filter Selection



Select All Messages

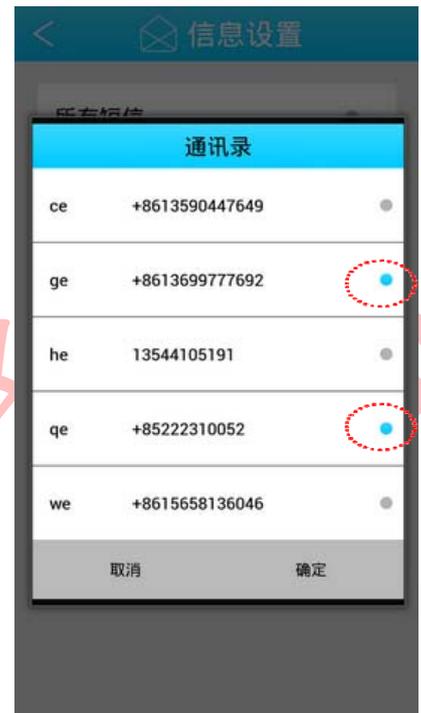

Select Set Messages

◆ **Remarks:**

To select the reminder function of Facebook、Twitter、WhatsApp、skype, you need to set the reminder message to Status Bar( Normally it is on the upside of your phone, symbol will flash if you have a message coming). For example , you can refer below settings of Facebook message



## ● Alarm (watch Alarm )Settings

➤ In setting interface , click Alarm to access Alarm Setting , this set alarm can synchronize with the watch alarm



Adjust Alarm Time

Select Week

Set Alarming Week

## ● User-defined Memo Alarming settings

In the setting interface, click Memo Alarm to input your memo content and alarming time

➤ When alarming time is up, the Memo Alarm symbol in your smart watch will flash and vibration or ringing .



Reminder Date Setting



Confirm Selection



Input Memo Content



Reminder Time Setting

## ● SOS Number Setting (Emergency Call)

➤ After set the SOS number, Press A,C key on watch to send Emergency order, phone will dial the number automatically



Input Phone Number

## ● Anti-lost Alert Settings


➤ After Anti-lost Alert function turn on ,When your mobile phone leave away from you , the smart watch will have vibration or alarming along with Alerting sound from mobile phone .



Anti-lost Alert ON

## ● Time Synchronization Settings

➤ Click Synchronous local time ,World time, DST time, your watch time will update and synchronize with your phone time automatically

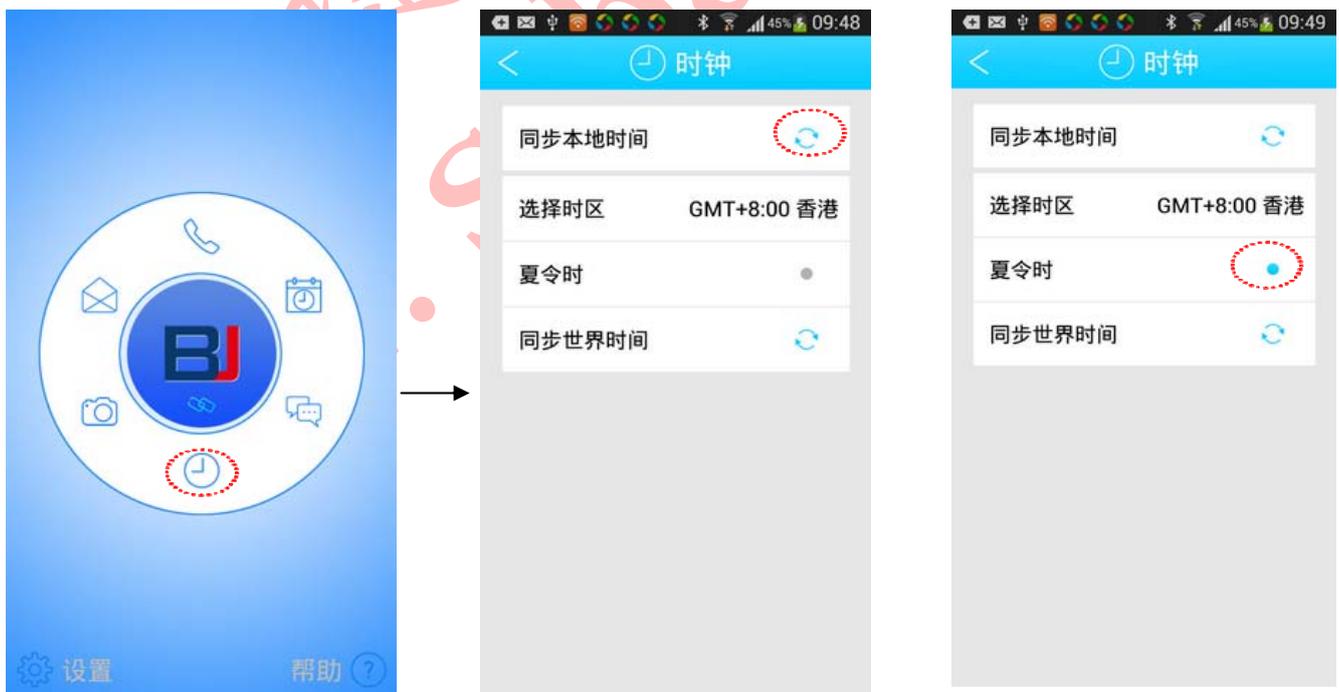

Local Time Synchronization

DST Time ON

## ● Phone Camera Function

➤ Click camera symbol to access photograph function, Press B and D key to turn on remote camera function



View picture

### Notice:

- 1) If Phone and watch didn't connect for work within 30 minutes , the watch will turn off Bluetooth automatically , you have to connect and start up all data again for next time use .
- 2) This watch support Bluetooth 4.0 BLE compliance, For APP support , please refer below table

Samsuny phone item No.	Android system		
	4.2.2	4.3	4.4
Samsung Galaxy S4	v	v	
Samsung Note2		v	
Samsung Note3		v	
LG Nexus 5			v

- 3) **Remark:** Please use original licensed mobile phone, copycat mobile phone can't support this watch for all functions .

## C. Specifications

- Movement Dimension (include outstanding) :  $\Phi 36.2\text{mm}$
- Thickness (include buzzer) :  $9.8 \pm 0.15\text{mm}$
- Work Temperature :  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Work Voltage :  $3.0\text{V}$
- Time Accuracy : s/m30 second
- Battery Code : CR2450(610mAh)
- Static Max Crrnt (Bluetooth OFF) :  $\leq 20\mu\text{A}$
- Static Aerge Current (Bluetooth OFF) :  $\leq 18\mu\text{A}$
- Working Max Current (with Bluetooth connection) :  $\leq 0.5\text{mA}$
- Working Average Current (with Bluetooth connection) :  $\leq 40\mu\text{A}$
- Alarm Average Current :  $\leq 2.0\text{mA}$
- EL Backlight Average Current :  $\leq 10\text{mA}$
- Vabration Average Current :  $\leq 30\text{mA}$
- Battery Life: (Calculate according to :1 day 1 time alarm for 30S, 1 day 4 times EL backlight for 12S, phone call , message,wei chat,memo reminder for 3 times vabriation or alarming) :  $\geq 18\text{Months}$ (Janpan battery)

www.szbaojie.com

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	
Date	14/07/01	14/07/01	14/07/01