




A . Features


- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day
- Daily Alarm
- Snooze
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

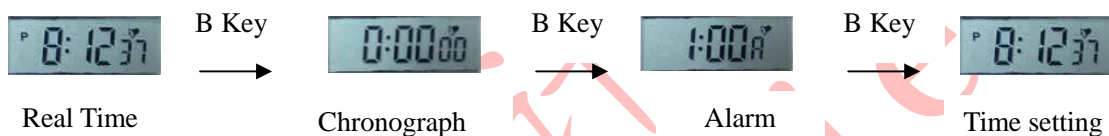

1. At any state ,press C key EL backlight for 3s .

2. Real Time

- Press A key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm
 - a). Press A + D key to turn on / off Alarm ,indicator “” displaying for On .

3. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Stopwatch time of 0.01 seconds at the beginning; 30 minutes to seconds time.
- Press D key to Start/Stop running ;
- When stop ,press A key to zero .
- When running ,press A key to split count.
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press A key to display all counts ; and press A key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press A key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press A key to confirm
- Press B key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press A key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

5. Time Setting

"Second " flashing when loading ,press D key to zero ; Press A key to select item as following sequence :
Minute → Hour → Day → Month

- Press D key to adjust the flashing item.
- When setting "Hour " ,"H" display for 2 4 H format ;" A " or " P " for 1 2 H format .
- Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : $\Phi 36.2\text{mm}$
- Module Thickness (include buzzer) : 9.5mm
- Operational Temperature Range : $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : $\pm 90\text{sec/month}$
- Battery Code : CR2025(capacitance: 170m Ah)
- static average current : $\leq 0.86\mu\text{A}$ (static maximum current : 3.5uA)
- Alarm average current : $\leq 1.17\text{mA}$ (Alarm maximum current : 7.0mA)
- EL lighten average current : $\leq 5.77\text{mA}$ (ELlighten maximum current : 10mA)
- Battery life : $\geq 24\text{ month}$ (Japan Lithium)

(Battery life calculate according to EL lighten four time each day for 3 second each time , alarm foe 60 seconds each day)

	Prepared	Checked	Approved
Name	冯碧颜	徐治中	宋检望
Date	10/07/29	10/07/29	10/07/29