



A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph
- Dual time .
- EL backlight

B . Operational Manual



1. At any state ,press A key EL backlight for 3s .

2. Real Time

- Press C key for 2 seconds to enter into the time setting mode. "Second " flashing when loading , press B key to zero ; Press C key to select the blinking digit according to the following sequence: Hour → Minute → 12H/24H . Press B key to adjust the flashing
- Press B key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.
- If there is no key operation for 60 second, Setting Mode will be exit and returned to Real Time Display Mode.


3. Date Mode

- Press C key for 2 seconds to enter into the date setting mode "Year" flashing when loading .Press C key to select item as following sequence: "Month"、 Day .Press B key to adjust the flashing .
- If there is no key operation for 60 second, Setting Mode will be exit and returned to Date Display Mode.

4. Daily Alarm

- Press C key for 2 seconds to enter into the date setting mode, "Hour " flashing .Press C key to select item as following sequence: “ Minute (hour digit) ”、 “ Minute (Minute digit) ”、 “ ALARM/CHIME ” switch .
- Press B key to adjust the flashing .

- Intercalate “ALRM/CHIME ” switch , gradation as follows :

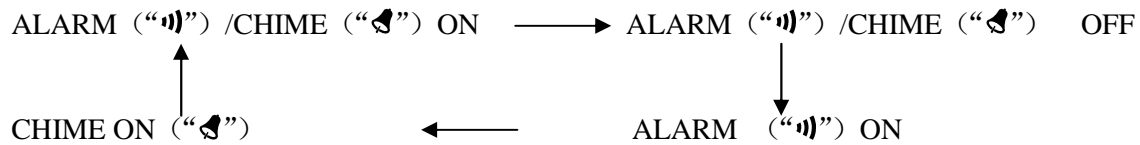

- There will be 20s alert when alarm time is over.
- If there is no key operation for 60 second, Setting Mode will be exit and returned to Alarm Display Mode.

5. Dual time

- Press C key for 2 seconds to enter into the Dual time setting mode," Hour " flashing when loading , Press C key to select item as following sequence :
Minute →12H/24H
- Press B key to adjust the flashing.
- If there is no key operation for 60 second, Setting Mode will be exit and returned to Dual Time Display Mode.

6. Chronograph

- Press C key to Start/Stop running ; When stop , press C key for 2 seconds zero .

C. Specifications

- Module Size : 37.40*30.20mm
- Module Thickness (include buzzer): 7.70mm
- Operational Temperature Range : -10℃~60℃
- Operational Voltage : 3.0V
- Accuracy : ±90sec/month
- Battery Code : CR2016 (capacitance:90m Ah)
- static average current : ≤0.43u A (static maximum current : 5.0uA)
- Alarm average current : ≤1.20m A (Alarm maximum current : 5.0mA)
- EL lighten average current : ≤8.79m A (ELlighten maximum current : 10.0mA)
- Battery life (85%) : ≥24month

Under the following conditions:(4 backlight operation (3 seconds) perday; 60 seconds of alarm operation per day)

	Prepared	Checked	Approve
Name	冯碧颜	徐治中	刘成恒
Date	13/12/25	13/12/25	13/12/25