




A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

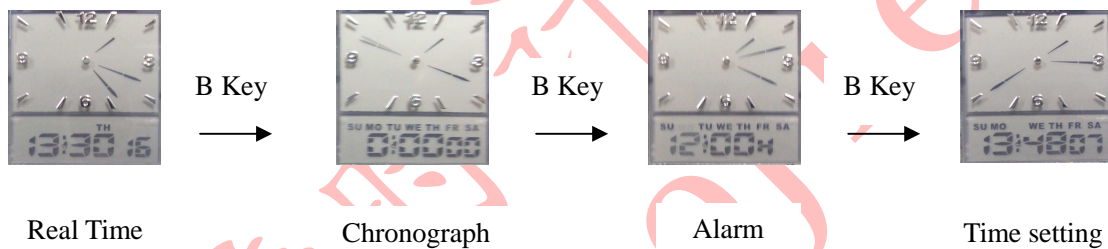

1. At any state ,press D key EL backlight for 3s .

2. Fingers setting

- At any state ,press A key to "Second" finger zero ;
- Press and holding A key to adjust "Minute" finger ,and "Hour" finger auto adjusted with it .

3. Real Time

- Press C key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm and Chime
 - a). Press C + D key to turn on / off Alarm ,indicator “🔔” displaying for On .
 - b). Press C + B key to turn On / Off Chime ,all days of week displaying for On .

4. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count .
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

5. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press C key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press C key to confirm
- Press B key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press C key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

6. Time Setting

"Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :
Minute → Hour → Day → Month → Week

- Press D key to adjust the flashing item.
- When setting "Hour " ," H " display for 2 4 H format ;" A " or " P " for 1 2 H format .
- Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Dimension(including protrusion) : 24.3*26.3mm
- Module Thickness(including buzzer) : 7.7±0.15mm
- Operational Temperature Range : -10℃~60℃
- Operational Voltage : 1.5V
- Time Accuracy : ±90sec/month
- Battery Code : LR1120
- Static Maximum Driving Current : ≤3.5 u A(T=25℃)
- Static Average Driving Current : ≤2.5 u A(T=25℃)
- Alarm Current : ≤2.5 m A
- EL Current : ≤10 m A
- Battery life 3 backlight operation (6 seconds) per day : 12 months(made in Japan)
20 seconds of alarm operation per day

	Prepared	Checked	Approve
Name	冯碧颜	徐治中	宋检望
Date	08/08/14	08/08/14	08/08/14