


LIGHT (A Key) ———

MODE (B Key) ———




(D Key) START

(C Key) RESET

A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

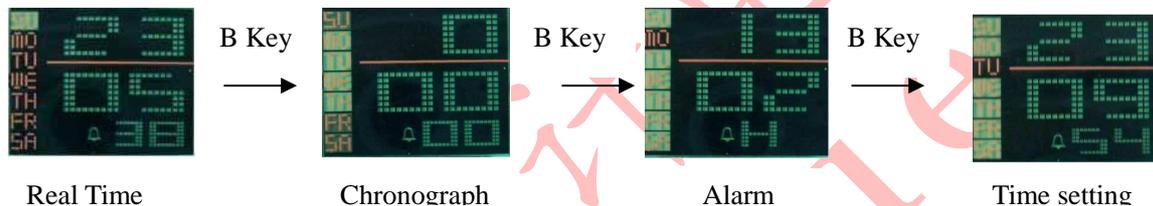

1. At any state ,press A key EL backlight for 3s .

2. Real Time

- Press C key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm and Chime
 - a). Press C + D key to turn on / off Alarm ,indicator "  " displaying for On .
 - b). Press C + B key to turn On / Off Chime ,all days of week displaying for On .

3. Chronograph

- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count .
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press C key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press C key to confirm
- Press B key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press C key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

5. Time Setting

"Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :

Minute → Hour → Day → Month → Week

- Press D key to adjust the flashing item.
- When setting "Hour " ,"H" display for 2 4 H format ;" A " or " P " for 1 2 H format .
- Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : 32.1*28.6mm
- Module Thickness : 7.95mm
- Operational Temperature Range : -10°C~60°C
- Operational Voltage : 3.0V
- Accuracy : ±90sec/month
- Battery Code : CR2025
- Current Consumption for Digit : ≤3.5 u A(T=25°C)
- Alarm Current : ≤2.5 m A
- EL Current : ≤11 m A
- Battery life 3 backlight operation (9 seconds) per day : 24month
60 seconds of alarm operation per day

	Prepared	Checked	Approve
Name	罗映刚	韦章龙	刘成恒
Date	05/11/02	05/11/02	05/11/02