




A . Features

- 13 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable, Auto Calendar
- 1/100 second Chronograph with split functions
- Timer
- Dual Time
- EL backlight

B . Operational Manual

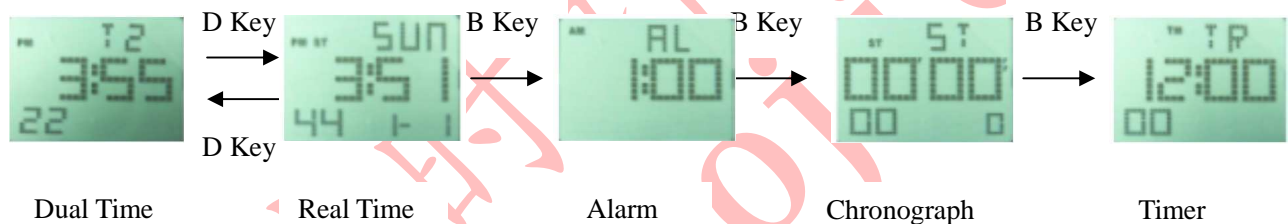

1. At any state ,press A key EL backlight for 3s .

2. Real Time

- Time Setting
Press and hold C key for 2s to time setting state and "Second" flashing, press D key to zero; Press B key to select item as following sequence :
Second → Minute → Hour → 12/24H format → Month → Day → Week
When setting "Hour " ,"AM" or "PM" display for 1 2 H format . Press D key to adjust the flashing item, Press C key to return to Real Time Mode.

3. Daily Alarm

- Turn On / Off Alarm and Chime
Press D key to turn on/off Alarm (ALM) or Chime (CHI) .
- Alarm setting
Press and hold C key for 2s to select "Hour" setting ; Press B key to select "Minute" setting; Press D key to adjust the flashing item.
- There will be 20s alert when alarm time is over.

4. Dual Time

- Dual Time setting
In the Dual Time mode ,Press and hold C key for 2s to select "Minute" setting, Press B key to select "Hour" setting, Press D key to adjust the flashing item, Press C key again to finish setting ,and return to Dual Time, displaying mode .

5. Timer mode

- Timer Time setting
Press and hold C key for 2s to time setting state and "Hour" flashing , Press B key to select "Hour" or "Minute" setting ,Press D key to adjust the flashing item, Press C key to complete setting.
- Timer operation
Press D key to Start/Stop counting ; Press C key to zero when stop counting.

6. Chronograph

- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to LAP Counting.
- When running ,press B key to return to Real Time mode ,and it running at back .

C. Specifications

- Module Size : 33.95*26.10mm
- Module Thickness : 7.9mm
- Operational Temperature Range : -10°C~60°C
- Operational Voltage : 3.0V
- Accuracy : ±90sec/month
- Battery Code : CR2025
- Current Consumption for Digit (maxima) : ≤4.5 u A(T=25°C)
- Current Consumption for Digit (averagely) : ≤3.8 u A(T=25°C)
- Alarm Current : ≤2.5 m A
- EL Current : ≤10 m A
- Battery life 2 backlight operation (6 seconds) per day : 24 month (Japan Lithium)
20 seconds of alarm operation per day

| | Prepared | Checked | Approve |
|------|----------|----------|----------|
| Name | 冯碧颜 | 徐治中 | 宋检望 |
| Date | 12/10/20 | 12/10/20 | 12/10/20 |