

LIGHT (A Key) ———



———— (D Key) START


MODE (B Key) ———

———— (C Key) RESET

A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

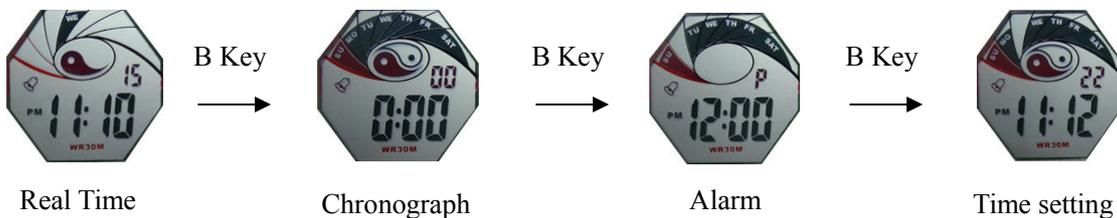

1. At any state ,press A key LED backlight for 6s ; press D key EL backlight for 3s.

2. Real Time

- Press C key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm and Chime
 - a). Press C + D key to turn on / off Alarm ,indicator “🔔” displaying for On .
 - b). Press C + B key to turn On / Off Chime ,all days of week displaying for On .

3. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count .
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press C key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press C key to confirm
- Press B key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press C key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

5. Time Setting

"Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :
Minute → Hour → Day → Month → Week

- Press D key to adjust the flashing item.
- When setting "Hour " ,"H" display for 2 4 H format ;" A " or " P " for 1 2 H format .
- Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : $\Phi 33.1\text{mm}$
- Module Thickness (include buzzer) : 10mm
- Operational Temperature Range : $-10^{\circ}\text{C}\sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : $\pm 45\text{sec/month}$
- Battery Code : CR2025(capacitance: 170m Ah)
- static average current : $\leq 1.93\mu\text{A}$ (static maximum current : 3.5uA)
- Alarm average current : $\leq 0.96\text{m A}$ (Alarm maximum current : 3.5mA)
- EL lighten average current : $\leq 6.21\text{m A}$ (EL lighten maximum current : 10mA)
- LED lighten average current : $\leq 5.26\text{m A}$ (LED lighten maximum current : 8.0mA)
- Battery life (85%) : $\geq 36\text{month}$ (Japan Lithium)

(Battery life calculate according to EL lighten four time each day for 3 second each time , alarm foe 60 seconds each day)

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	汤志平
Date	16/08/26	16/08/26	16/08/26