

LIGHT/START (A Key) _____

MODE (B Key) _____




_____ (C Key) RESET

A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 H format, Auto Calendar
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

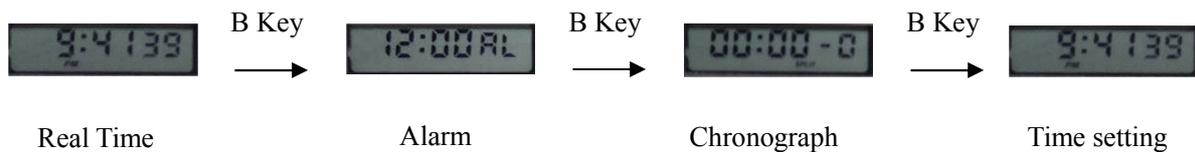

1. At any state ,press A key EL backlight for 3s .

2. Timekeeping

- In the timekeeping mode, Press A key to display “Month”、”Day” and ”week”.

3. Daily Alarm

- Turn On / Off Alarm and Chime
Press A key to turn on/off Alarm (●||) or Chime (♪).
- Alarm setting : Press C key to select "Hour " or "Minute "setting, Press A key to adjust the flashing item, Press C key to confirm, Press B key to return to Real Time mode.
- There will be 20s alert when alarm time is over.

4. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Press A key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count.
- Then press A key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

5. Time Setting

"Second " flashing when loading ,press A key to zero ; Press C key to select item as following sequence :

Hour → Minute → Month → Day → Week

- Press A key to adjust the flashing item.
- Press D key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : 24.50*27.7mm
- Module Thickness (include buzzer) : 6.30mm
- Operational Temperature Range : -10°C~60°C
- Operational Voltage : 1.5V
- Accuracy : ±90sec/month
- Battery Code : V391(capacitance: 40m Ah)
- static average current : ≤1.56u A (static maximum current : 3.0uA)
- Alarm average current : ≤1.73m A (Alarm maximum current : 4.5mA)
- EL lighten average current : ≤3.92m A (ELlighten maximum current : 6.0mA)
- Battery life (85%) : ≥12 month

Under the following conditions:(4 backlight operation (3 seconds) perday; 60 seconds of alarm operation per day)

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	汤志平
Date	16/11/04	16/11/04	16/11/04