




A . Features

- 12 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

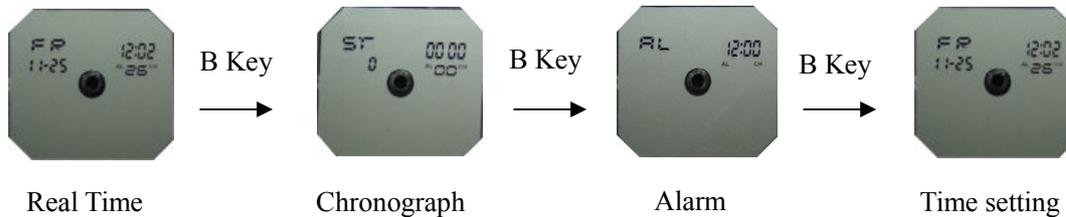

1. At any state ,press **A** key EL backlight for 3s .

2. Chronograph

- Press **D** key to Start/Stop running ;
- When stop ,press **C** key to zero .
- When running ,press **C** key to split count. indicator "SP" showing
- Then press **D** key to exit split count ,and stop counting ; press **C** key again to zero ;
- When running ,press **B** key to return to Real Time Mode ,and it running at back .

3. Daily Alarm

- Turn On / Off Alarm and Chime
Press **D** key to turn on/off Alarm (**AL**) or Chime (**CH**)
- Alarm setting : Press **C** key to select "Hour " or "Minute "setting, Press **D** key to adjust the flashing item, Press **C** key to confirm, Press **B** key to return to Real Time mode.
- Alarm Snooze ON/OFF

At Alarm sounding state ,press **C** key or **D** key to stop sounding ,and press **B** key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for 20 Second.

4. Time Setting

- "Second " flashing when loading ,press **D** key to zero ; Press **C** key to select item as following sequence :
Hour → Minute → Month → Day → Day of Week → Second
- When setting "Hour " , "H" display for 2 4 H format ;" A " or " P " for 1 2 H format .
- Press **D** key while the seconds are in the range of 30 to 59 resets them to 00 and adds 1 to the minutes . In the range of 00 to 29,the minutes are unchanged.

C. Specifications

- Module Size : $\Phi 36.2\text{mm}$
- Module Thickness (include buzzer) : 9.55mm
- Operational Temperature Range : $-10^{\circ}\text{C}\sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : $\pm 90\text{sec/month}$
- Battery Code : CR2025(capacitance: 170m Ah)
- static average current : $\leq 1.25\mu\text{A}$ (static maximum current : 3.5uA)
- Alarm average current : $\leq 1.07\text{m A}$ (Alarm maximum current : 3.5mA)
- EL lighten average current : $\leq 7.37\text{m A}$ (ELlighten maximum current : 10.0mA)
- Battery life (90%) : $\geq 36\text{ month}$ (Japan Lithium)

Under the following conditions:(4 backlight operation (3 seconds) perday; 60 seconds of alarm operation per day)

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	汤志平
Date	16/10/28	16/10/28	16/10/28