


LIGHT (A Key) ——— (D Key) START
 MODE (B Key) ——— (C Key) RESET



A . Features

- 10 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

B . Operational Manual

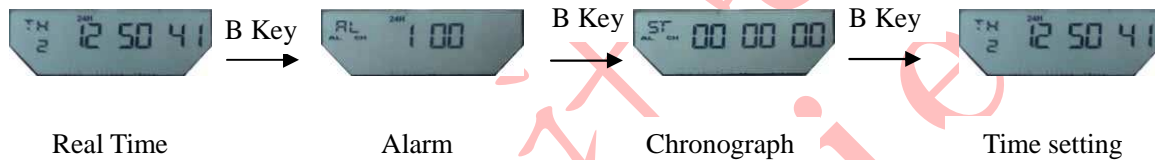

1. At any state ,press A key EL backlight for 3s .

2. Real Time

- In Time Mode , press D key to toggle between .12HR and 24HR display format.

3. Daily Alarm

- Turn On / Off Alarm and Chime
 Press D key to turn on/off Alarm (“ AL ”) or Chime (“ CH ”)
- The alarm tone sounds at the preset time for about 20 seconds .Pressing any button stops the alarm tone operation .
- Alarm setting : Press C key to select "Hour " or "Minute "setting, Press D key to adjust the flashing item, Press C key to confirm, Press B key to return to Real Time mode.

4. Chronograph

- The display range of the Chronograph is 23hour,59 minutes,59.99seconds
- Press D key to Start/Stop running ;
- When stop ,press C key to zero .
- When running ,press C key to split count.
- Then press D key to exit split count ,and stop counting ; press C key to display all counts ,press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

5. Time Setting

- "Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :
 Hour → Minute → Month → Day → Day of Week → Second
- Press D key to adjust the flashing item.

C. Specifications

- Module Size : $\Phi 42.2\text{mm}$
- Module Thickness (include buzzer) : 9.6mm
- Operational Temperature Range : $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy : $\pm 90\text{sec/month}$
- Battery Code : CR2025(capacitance: 170m Ah)
- static average current : $\leq 1.74\mu\text{A}$ (static maximum current : 3.5uA)
- Alarm average current : $\leq 0.67\text{m A}$ (Alarm maximum current : 5.0mA)
- EL lighten average current : $\leq 5.99\text{m A}$ (ELlighten maximum current : 10mA)
- Battery life (90%) : ≥ 24 month(Japan Lithium)

(Battery life calculate according to EL lighten four time each day for 3 second each time , alarm foe 60 seconds each day)

	Prepared	Checked	Approved
Name	冯碧颜	徐治中	宋检望
Date	10/09/02	10/09/08	10/09/08