

LIGHT (A Key) _____



_____ (D Key) START


MODE (B Key) _____

_____ (C Key) RESET

A. Features

- 12 digits LCD screen displays hour, minute, second, month, date and week.
- Daily Alarm and Hourly Time Signal.
- Snooze
- 12-hour / 24-hour format selectable.
- 1/100 second stopwatch with split functions.
- EL backlight.

B . Operational Manual

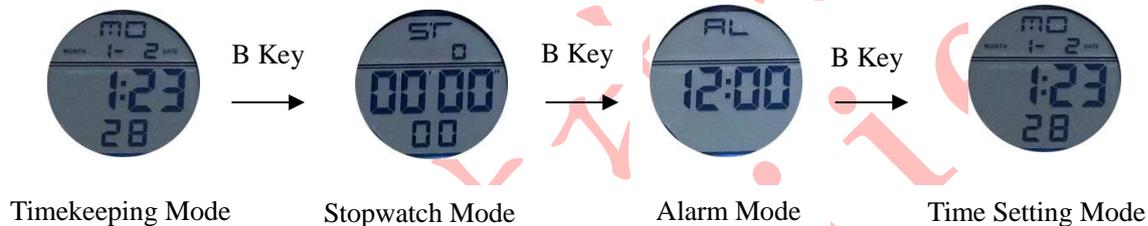

1. In any mode, EL will illuminates for 3 seconds by pressing A key, press B key to select operation mode.

2. Stopwatch mode

- The display range of the stopwatch is 23 hours, 59 minutes, 59.99 seconds, when reaches its limit (23 hours, 59 minutes, 59.99 seconds), the stopwatch will automatically re-start to count from zero.
- When stopwatch is more than 59 minutes 59.99 seconds, it will display from 1 hour to 23 hours at “date” position.
- **To measure times with stopwatch:** In stopwatch mode, press D key once to start counting, then press D key again to stop counting. When it stops, seconds clear to zero by pressing C key.
- **To measure times with split time:** In stopwatch mode, press D key to start counting, and press C key to enter split time. along with “ ■ ” indicator flash to display on the screen, and press D button to stop counting, press C button to display all times of stopwatch, then stopwatch resets to zero by pressing C button.
- In stopwatch mode, press D key to start counting, and press C key to enter split time. along with “ ■ ” indicator flash to display on the screen, then press C key again to exit SPL, and press D button to stop counting, then stopwatch resets to zero by pressing C button.
- When stopwatch is running, press B key three times to return to time display mode, it will continue to run in the background.
- When at the state of split time, press B key to exit from split time, the stopwatch will continue to run in the background.

