




## A . Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

## B . Operational Manual

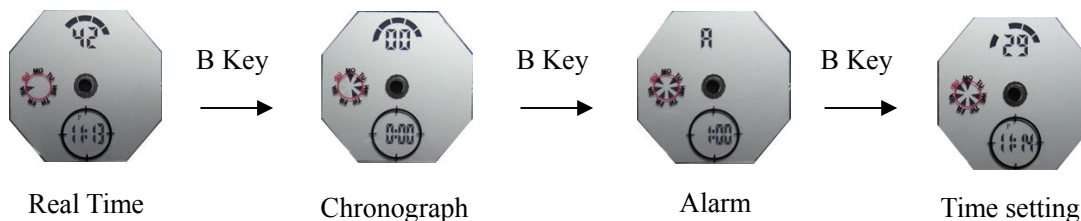

1. At any state ,press **A** key EL backlight for 3s .

### 2. Real Time

- Press **C** key to display Alarm ;Press **D** key to display Date .
- Turn On / Off Alarm and Chime
  - a). Press **C + D** key to turn on / off Alarm ,indicator **"ALM"** displaying for On .
  - b). Press **C + B** key to turn On / Off Chime ,all days of week displaying for On .

### 3. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Press **D** key to Start/Stop running ;
- When stop ,press **C** key to zero .
- When running ,press **C** key to split count .
- Then press **D** key to exit split count ,and stop counting ;
- When exit split count ,press **C** key to display all counts ; and press **C** key again to zero ;
- When running ,press **B** key to return to Real Time Mode ,and it running at back .

### 4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press **C** key to select "Hour " or "Minute "setting
- Press **D** key to adjust the flashing item
- Press **C** key to confirm
- Press **B** key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press **C** key to stop sounding ,and press **D** key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

## 5. Time Setting

"Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :  
Minute → Hour → Day → Month → Week

- Press D key to adjust the flashing item.
- When setting "Hour " ,"H" display for 2 4 H format ;" A " or " P " for 1 2 H format .

## C. Specifications

- Module Size :  $\Phi 35.2\text{mm}$
- Module Thickness (include buzzer) : 9.90mm
- Operational Temperature Range :  $-10^{\circ}\text{C}\sim 60^{\circ}\text{C}$
- Operational Voltage : 3.0V
- Accuracy :  $\pm 90\text{sec/month}$
- Battery Code : CR2025(capacitance: 170m Ah)
- static average current :  $\leq 1.95\mu\text{A}$  (static maximum current : 2.17uA)
- Alarm average current :  $\leq 1.75\text{m A}$  (Alarm maximum current : 4.51mA)
- EL lighten average current :  $\leq 6.92\text{m A}$  (ELlighten maximum current : 10mA)
- Battery life (85%) :  $\geq 36\text{ month}$ (Japan Lithium)

(Battery life calculate according to EL lighten four time each day for 3 second each time , alarm foe 60 seconds each day)

	Prepared	Checked	Approved
Name	冯碧颜	赵星亮	汤志平
Date	16/10/10	16/10/10	16/10/10